

Approval Sheet for SMD LED

Reference No : T3528HM-032
Version No : Rev 3.0
Customer Name :
Model Name : LFMYL-LM31
Color : Yellow Color
Issued Date : 02 Feb. 2010

Customer

| | | | | | |
|----------|--|--|--|--|--|
| Customer | | | | | |
| | | | | | |
| | | | | | |

CTL

| CTL | | | | | |
|----------|-------|----|-------|--|----------|
| Develop. | Prod. | QA | Sales | | Approved |
| | | | | | |

Remarks:



358-1. Sin-Dong, Yungtong-Gu, Suwon-Si, Gyeonggi-Do, 442-390
<http://www.ctlinc.co.kr> Tel : (031) 205-0450., Fax : (031) 205-5315

| Spec No. | Ver. | Date | Page |
|-------------|------|------------|-------|
| T3528HM-032 | 3.0 | 2010/02/02 | 2/ 15 |

1. Features and Applications


- Package : SMD Package
- Resin : colorless clear type
- Dimensions in mm : 3.5 x 2.8 x 1.9 (L x W x H)
- Approx Weight : 35mg
- Technology : AllInGaP Yellow Color
- Viewing Angle : wide (120°)
- Assembly methods : suitable for all SMT assembly methods
- Soldering methods : Compatible to both IR reflow soldering and TTW soldering
- Preconditioning : acc. to JEDEC Level 2a
- MSL : Qualified according to JEDEC moisture sensitivity Level 2a.
- Taping : 8mm conductive black carrier tape & antistatic clear cover tape
2,000pcs/reel, Φ180mm wheel
- ESD-withstand voltage : Class 2 acc. to JESD22-A114-C
- RoHs : Environmental friendly, RoHS compliance.

Applications:

- Outdoor displays
- Backlighting (LCD, switches, keys, displays, illuminated advertising, general lighting)
- Interior automotive lighting (e.g. dashboard backlighting, etc.)
- Indicator


2. Part Name Description

L F M YL - LM 31

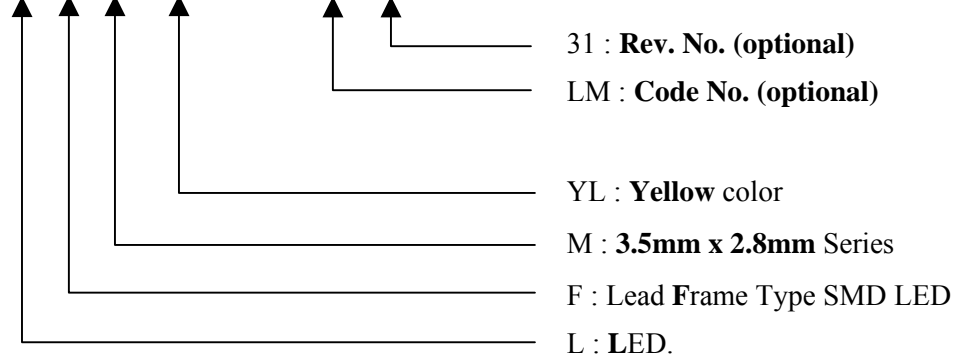

3. Outline Dimensions and Materials


1) Outline Dimensions

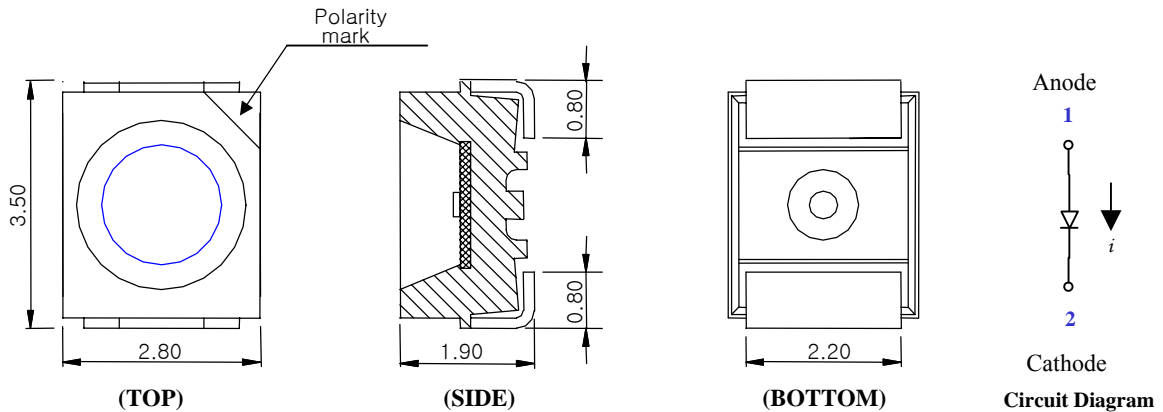

- MODEL : LFMYL
- TYPE : 3.5 x 2.8 x 1.9 (t)
- TOLERANCE : ± 0.15 mm

2) Materials

- Package : Epoxy Resin , Clear (Optional : Diffuser type)
- Paste : Silver filled Epoxy
- Electrode : Ag Plating

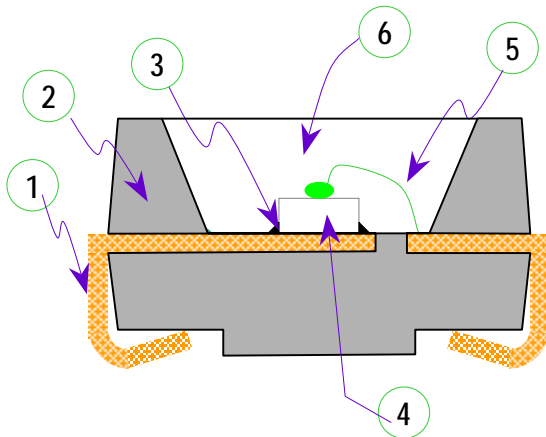

| Number | Item | Material |
|--------|----------|----------------|
| 1 | Lead | Cu / Ag |
| 2 | Pre Mold | PPA |
| 3 | Paste | Ag Paste |
| 4 | LED Chip | AllnGaP / GaAs |
| 5 | Wire | Gold Wire |
| 6 | Epoxy | Clear Epoxy |

4. Specifications

1) Absolute Maximum Ratings

| Items | Symbol | Maximum Rating | Unit |
|------------------------|-----------|----------------|------|
| Forward Current | I_F | 20 | mA |
| Pulse Forward Current* | I_{FP} | 100 | mA |
| Reverse Voltage | V_R | 5 | V |
| Power Dissipation | P_D | 45 | mW |
| Operating Temperature | T_{opr} | - 40 ~ 100 | °C |
| Storage Temperature | T_{stg} | - 40 ~ 100 | °C |

$T_a = 25\text{ °C}$

I_{FP} Conditions : Pulse Width ≤ 0.1 msec. And Duty $\leq 1/10$

2) Initial Electrical / Optical Characteristics

| Items | Symbol | Min. | Typ. | Max. | Unit | Condition |
|----------------------------|-----------------|-------|------|-------|------|----------------------|
| Forward Voltage | V_F | 1.90 | - | 2.20 | | $I_F = 20\text{ mA}$ |
| Luminous Intensity | I_V | 150 | - | 350 | | $I_F = 20\text{ mA}$ |
| Dominant Wavelength | Wd | 579.0 | - | 591.0 | - | $I_F = 20\text{ mA}$ |
| Full Width at Half Maximum | $\Delta\lambda$ | - | 20 | - | nm | $I_F = 20\text{ mA}$ |
| Viewing Angle | 201/2 | - | 120 | - | Deg. | $I_F = 20\text{ mA}$ |

Luminous Intensity Measuring Equipment : LX4560A (Teknologue, JAPAN)

Voltages are tested at a current pulse duration 1ms and an accuracy of $\pm 0.1V$

Luminous Intensity is tested at a current pulse duration 5ms and an accuracy of $\pm 10\%$

Dominant Wavelength is tested at a current pulse duration 5ms and an accuracy of $\pm 1\text{nm}$

5. Grouping parameter

1) Dominant Wavelength Ranks

(Ta = 25 °C)

| W _D Rank | Min | Typ | Max | Unit | Test Condition |
|---------------------|-------|-----|-------|------|------------------------|
| B | 579.0 | - | 582.0 | nm | I _F = 20 mA |
| C | 582.0 | - | 585.0 | | |
| D | 585.0 | - | 588.0 | | |
| E | 588.0 | - | 591.0 | | |

2.0nm tolerance for dominant Wavelength may be caused by measurement inaccuracy.

2) Forward Voltage

(Ta = 25 °C)

| V _F Rank | Min | Typ | Max | Unit | Test Condition |
|---------------------|------|-----|------|------|------------------------|
| B | 1.90 | - | 2.20 | V | I _F = 20 mA |

Voltages are tested at a current pulse duration 1ms and an accuracy of ±0.1V

3) Luminous Intensity Ranks

(Ta = 25 °C)

| I _V Rank | Min | Typ | Max | Unit | Test Condition |
|---------------------|-----|-----|-----|------|------------------------|
| B | 150 | - | 200 | mcd | I _F = 20 mA |
| C | 200 | - | 250 | | |
| D | 250 | - | 300 | | |
| E | 300 | - | 350 | | |

Luminous Intensity is tested at a current pulse duration 5ms and an accuracy of ±10%

6. Typical Characteristic Curve

Fig.1 Maximum forward current vs. temperature

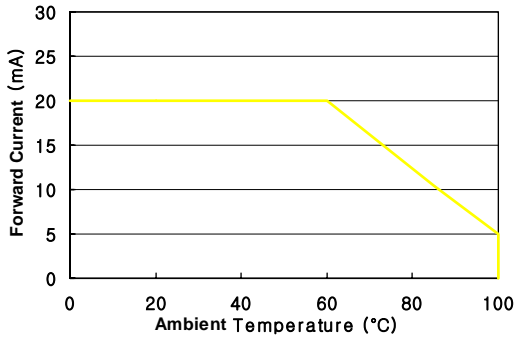


Fig.2 Forward current vs. Luminous Intensity

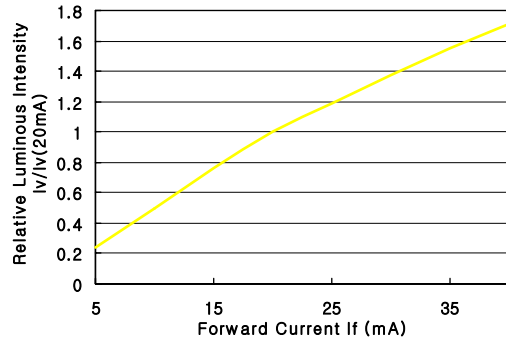


Fig.3 Wavelength Distribution

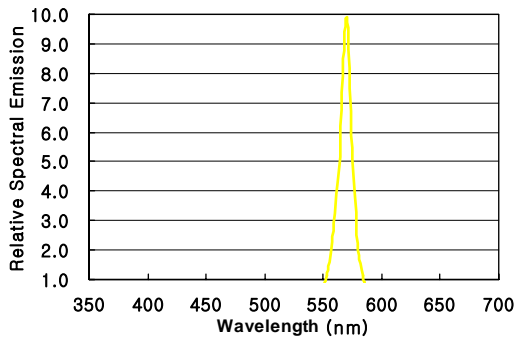


Fig.4 Forward voltage vs. Forward current

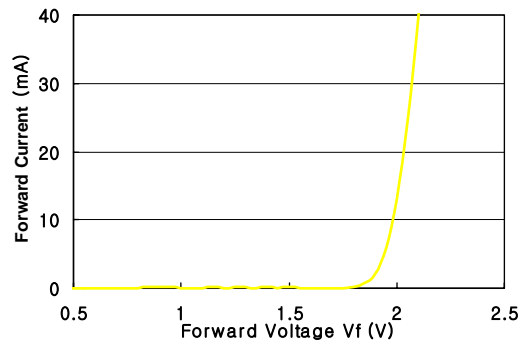


Fig.5 Dominant Wavelength


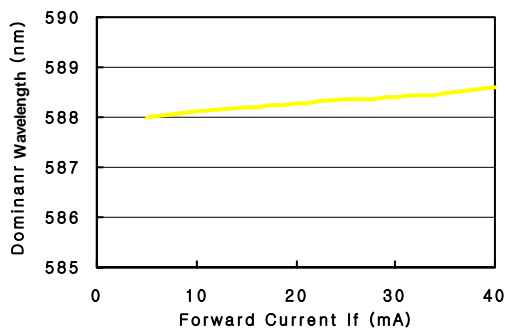



Fig.6 Radiation Diagram

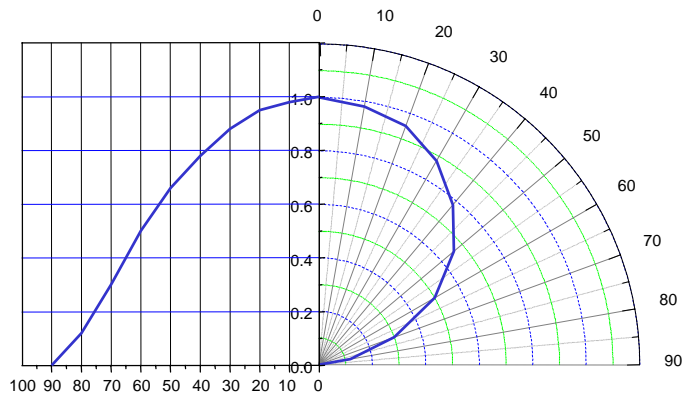


7. Soldering Conditions

Reflow soldering is recommended , and soldering should not be done more than two times.
 When repairing is done , a double-headed soldering iron should be used.

1) SnPb Eutectic Solder Re-flow Profile (JEDEC J-STD-020C).

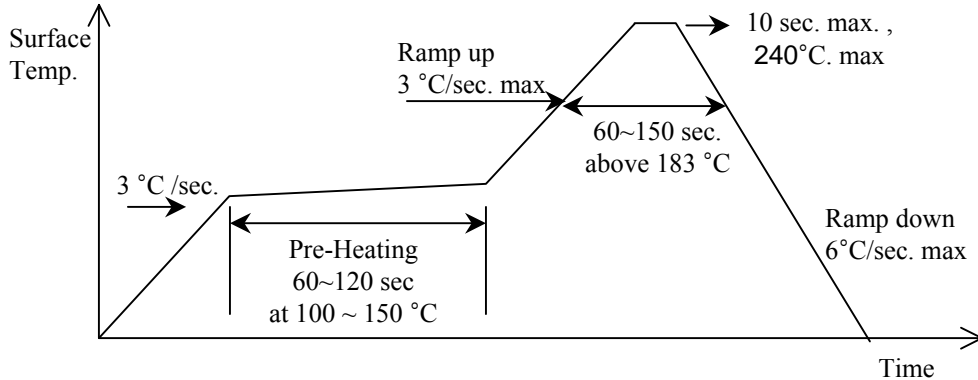


2) Lead-free Solder Re-flow Profile (JEDEC J-STD-020C).

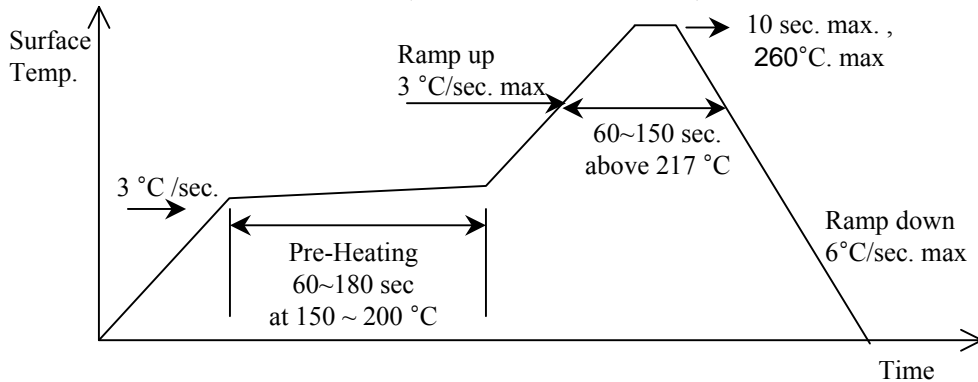


3) Solder Dip Profile

The Immersion of leads into a solder bath @MAX260 °C shall be to 5 seconds max.

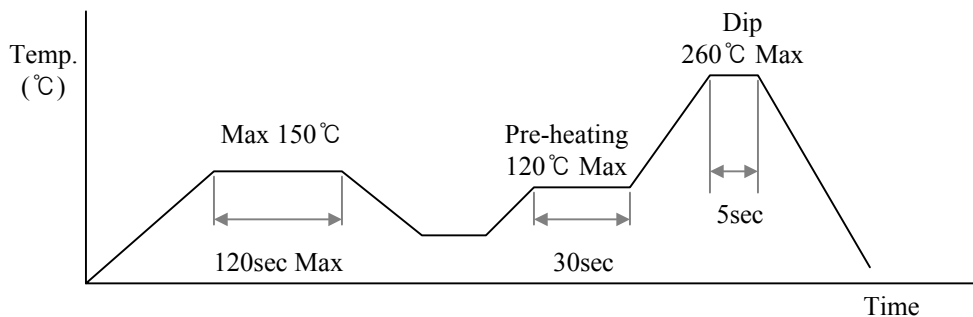


4) Double Wave Soldering Profile

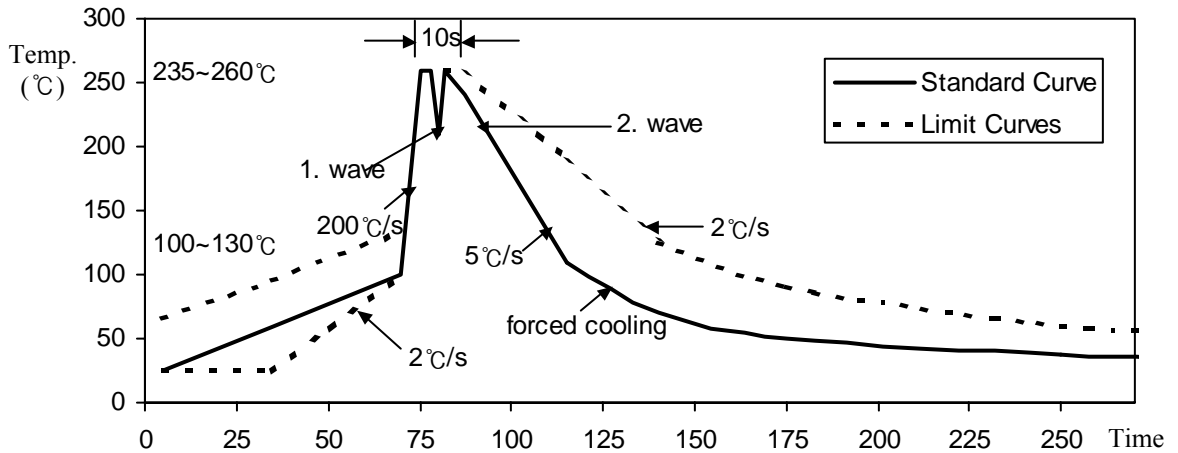


5) For manual solder

Not more than 5sec @max 300°C, under soldering iron.

6) Recommendable Soldering Pattern (for reflow soldering)

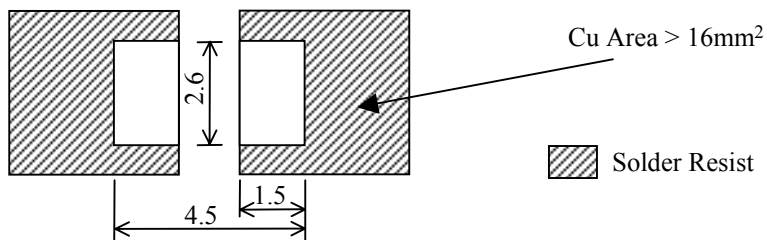

7) Recommendable Soldering Pattern (for Double Wave Soldering)


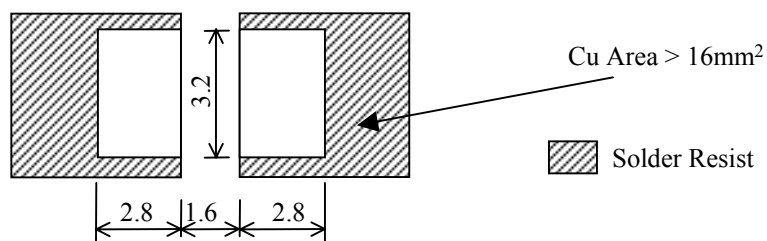


8) Precaution When Mounting

Do not apply force to the plastic part of the LED under high-temperature conditions.
 To avoid damaging the LED plastic do not apply friction using hard materials.
 When installing the PCB in product, ensure that the device does not come into contact with other components

9) Recommended Circuit model

- A) Recommended Circuit
 B) The difference of brightness between the LEDs could be found due to the V_F characteristics of each LED.




10) Recommended Operating Current


Operating current is optimized on test conditions of grouping parameter.
 We recommend the operating current of each LED more than 2mA.
 If the LED must be operated less than 2mA, special care should be taken to insure that the intensity of illumination is not ununiformed by deviation of the I_F upon low operating voltage.

11) Recommended Mounting Direction

Mount the LED in longitudinal direction of the board so that stress on product is decreased.
 We recommend the LED be placed on the PC Board as shown diagram A.
 If the LED must be placed on the PC Board as shown in diagram B, special care should be taken to insure that the LED is not effected by bend of the PC Board after the soldering process.

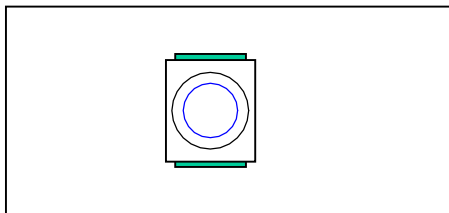


(A)

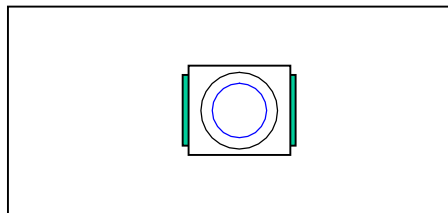


(B)

8. Packing Process and Materials


1) Dimension of tape (Material : PS Conductive, 10E4~5Ω)

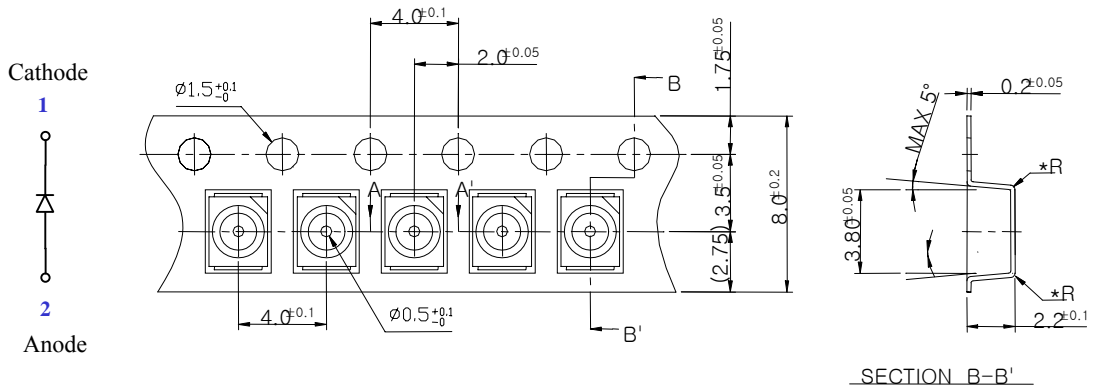

2) Details of Chip LEDs loading on tape

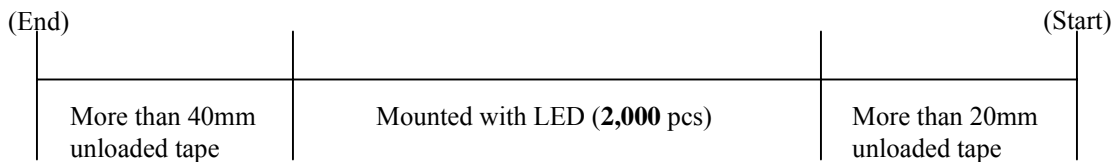




3) Dimension of Reel (Material : PS Conductive, 10E9~12Ω)

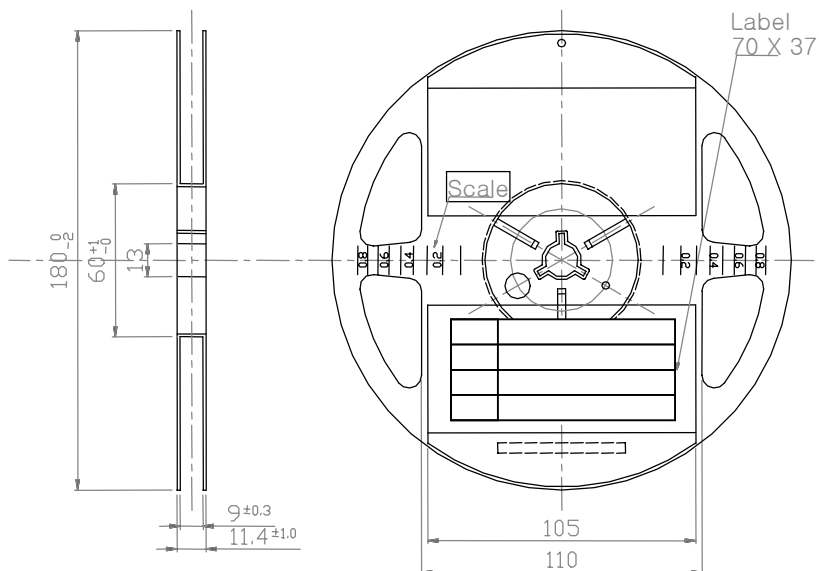

- (1) Quantity : Product are packed in one taping reel of max. **2,000** pcs.
- (2) Cumulative Tolerance : Cumulative Tolerance/10 pitches to be $\pm 0.2\text{mm}$
- (3) Adhesion Strength of Cover Tape : Adhesion strength to be 0.1-0.7N when the cover tape is turned off from the carrier tape at 10° angle to be the carrier tape.
- (4) Packaging : P/N, Manufacturing data Code No. and quantity to be indicated on a damp proof Package.


| Spec No. | Ver. | Date | Page |
|-------------|------|------------|--------|
| T3528HM-032 | 3.0 | 2010/02/02 | 11/ 15 |

4) Packing Structure

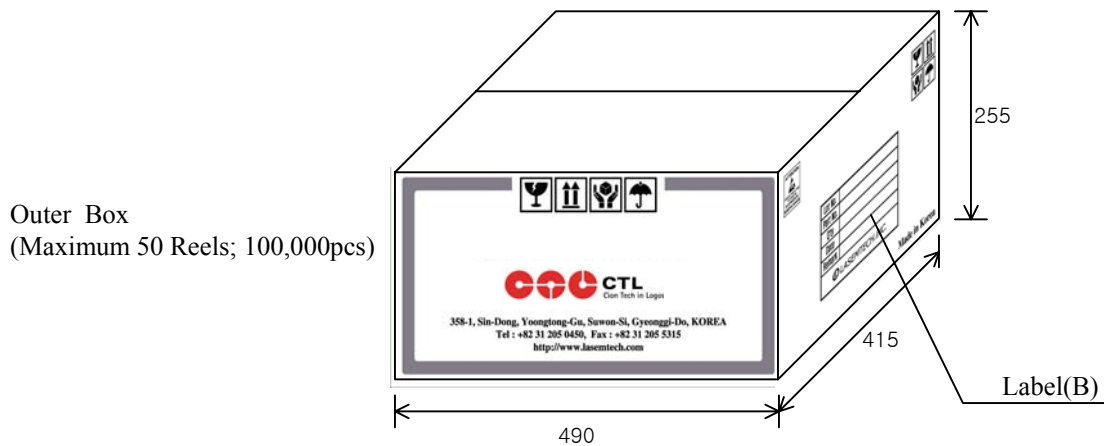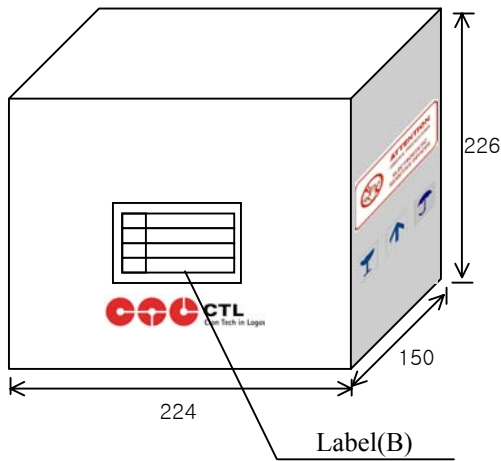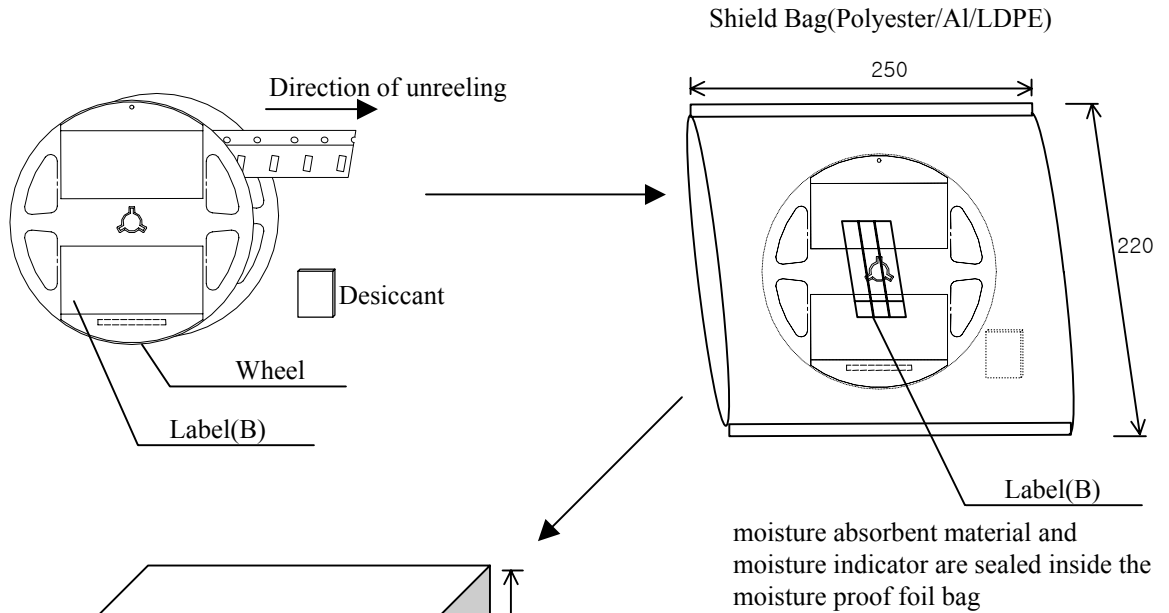


5) Labeling

Type1.

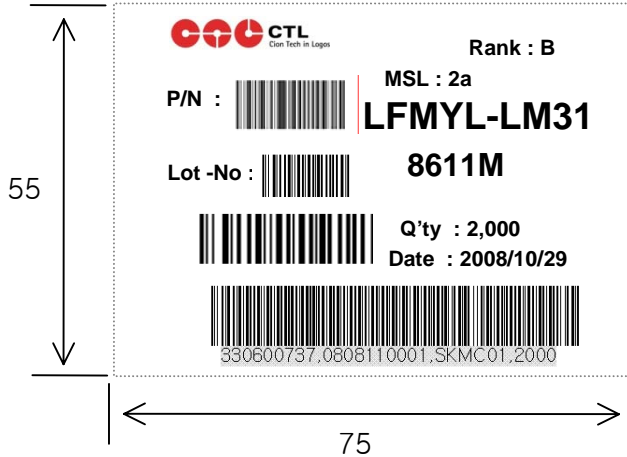


- Electrical/Optical Rank
- Product Code (Bar Code)
- Lot No (Bar Code)
- Reel Serial No
- Quantity (Bar Code)
- Packing Date(Bar Code)
- Customer Special (Bar Code)

Type2.

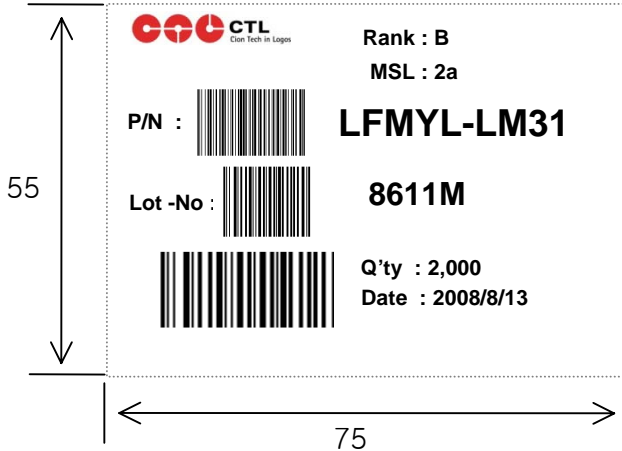

- Electrical/Optical Rank
- Product Code (Bar Code)
- Lot No (Bar Code)
- Reel Serial No
- Quantity (Bar Code)
- Packing Date(Bar Code)

Type3.

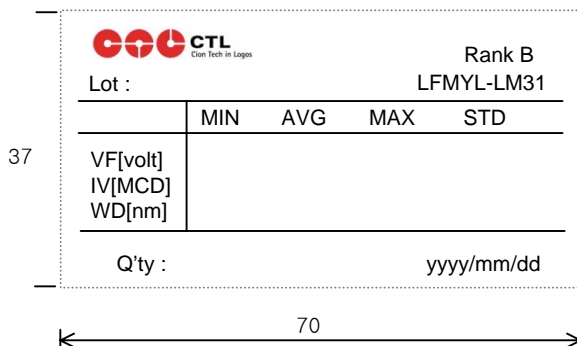

- Property Rank Number
- Reel No & CTL's P/N
- Electrical/Optical property Data
- Quantity & packing Date

9. Reliability

1) The reliability Criteria of SMD LED

| Items | Symbol | Test Conditions | Criteria for Judgement | |
|--------------------|--------|-------------------|------------------------|-----------------------|
| | | | Min. | Max. |
| Forward Voltage | V_F | $I_F=20\text{mA}$ | - | U.S.L.*) $\times 1.1$ |
| Luminous Intensity | I_V | $I_F=20\text{mA}$ | L.S.L.**) $\times 0.7$ | - |

□ *) U.S.L. : Upper Standard Level

**) L.S.L. : Lower Standard Level

2) Results of reliability test

| Test Items | Reference | Test Conditions | Note |
|---|---------------------------------|--|------|
| High Temperature Storage | JEITA ED-4701 200 201 | 100 °C / 1,000 hr. | 0/32 |
| Low Temperature Storage | JEITA ED-4701 200 202 | -40 °C / 1,000 hr. | 0/32 |
| Temp. Humidity Storage | JEITA ED-4701 100 103 | 60 °C / 90 % RH / 1,000 hr. | 0/32 |
| Steady State Operating Life | EIA/JESD 22- A108-B | 25 °C / 20 mA / 1,000 hr. | 0/32 |
| High Temperature Operating Life | EIA/JESD 22- A108-B | 85 °C / 10 mA / 1,000 hr. | 0/32 |
| Low Temperature Operating Life | EIA/JESD 22- A108-B | -40 °C / 20 mA / 1,000 hr. | 0/32 |
| Steady State Operating life of High Humidity Heat | JEITA ED-4701 100 102 | 60 °C / 90 % RH / 20 mA 1,000 hr. | 0/32 |
| Temperature Cycle | JEITA ED-4701 100 105 | -40°C (30min) → 25(5min.) → 100(30min.) / 100 cycle | 0/22 |
| ElectroStatic Discharge | EIA/JESD 22- A114-C: Class 2 | HBM : 100pF / 1.5kohm > ±2KV / 3 times | 0/22 |

10. Precaution for use

- This device should not be used in any type of fluid such as water, oil, organic solvent, etc.
When washing is required, IPA should be used.
- When the LEDs are illuminating, operating current should be decided after considering the ambient maximum temperature.
- LEDs must be stored to maintain a clean atmosphere.
If the LEDs are stored for 3months or more after being shipped from CTL, a sealed container with a nitrogen atmosphere should be used for storage.
- After opening the moisture proof packing, the LED's should be kept at 5°C~30°C, 60%RH or below.
The LEDs must be soldered within seven days(168 hours) after opening the moisture-proof packing.
If the LEDs remains after soldering, it should be stored into moisture proof container.
- Repack unused Products with anti-moisture packing, fold to close any opening and then store in a dry place.
- If upon opening, the moisture indicator card shows humidity 30% or above (Color of indication changes to pink) or the expiration date has passed, the device should be baked in taping with reel using the conditions of $65 \pm 5^\circ\text{C}$, 12~24hours.
After baking, use the baked devices within 72hours, but perform baking only once.
- Repeated baking can cause the peeling strength of the taping to change, then leads to trouble in mounting. Furthermore, prevent the devices from being destructed against static electricity for baking of it.
- The appearance and specifications of the product may be modified for improvement without notice.
- If the packing material of laminate would be broken, the hermeticity would deteriorate. Therefore, do not throw or drop the packed devices..
- This LEDs is sensitive to the electrostatic and surge,
It is recommended to use a wrist band or anti-electrostatic glove when handling the LEDs.
- If over-voltage which exceeds the absolute maximum rating is applied to LEDs, It will cause damage LEDs and result in destruction.
- Damaged LEDs will show unusual characteristics such as leak current remarkably increase, turn-on voltage becomes lower and the LEDs get unlight at low current.
- It is better not to use different rank LEDs.
If use mixed rank, could not attain your object for highest quality of products.

| Spec No. | Ver. | Date | Page |
|-------------|------|------------|--------|
| T3528HM-032 | 3.0 | 2010/02/02 | 15/ 15 |

11. Revision history sheet

| Spec No. | T3528HM-032 | | |
|----------|-----------------------------------|------------------------------------|---------|
| Title | Approval Sheet for SMD LED | | |
| Rev. No | Date | Summary of Revision | Remarks |
| 0.0 | 2007. 01. 03 | Initiate Document | |
| 1.0 | 2007. 02 .08 | Rank Revision | |
| 2.0 | 2009. 03. 02 | 8.5) Labeling | |
| 3.0 | 2010. 02. 02 | The homepage of company is changed | |
| | | | |